

Temporary Agreement, valid until 31st December 2020,
between
the Danish Energy Agency
and
the Swedish Post and Telecom Authority
concerning
the use of the frequency band 3400-3800 MHz

1. Principles and definitions

- 1.1 The 3.6 GHz band, as referred to in this agreement, corresponds to the frequency band 3400 -3800 MHz, with the TDD arrangement in accordance with ECC Decision (11)06.
- 1.2 Sweden and Denmark have signed a coordination agreement for the frequency band 3400-3800 MHz. The agreement is valid from 1st January 2021 and is currently under discussion for a modification.
- 1.3 This temporary coordination agreement is intended to cover the intermediate time period until 31st December 2021.
- 1.4 This temporary agreement is based on the concept of field strength levels on borderlines in accordance with ECC REC (15)01.
- 1.5 This temporary agreement covers the coordination of TDD (Time Division Duplex) and downlink only base stations. User equipment, or terminals, are allowed to be used on non-interference basis, in accordance with ITU RR 4.4.
- 1.6 For the purpose of this temporary agreement the borderline of Denmark and Sweden respectively is defined as the coastline, excluding the islands of Flakfortet, Middelgrund, Peberholmen and Saltholmen in Denmark and excluding the island of Ven in Sweden.
- 1.7 The latest version of ITU-R P.1546 "Method for point-to-area predictions for terrestrial services in the frequency range 30-4000 MHz" shall be used for predictions of field strength values.

2. Use of frequencies without coordination by administrations

- 2.1 Denmark may use the 3.6 GHz band without coordination with Sweden, if the predicted field strength E_0 produced by a base station does not exceed 32 dB(μ V/m)/5 MHz at the Swedish borderline and beyond.
- 2.2 Sweden may use the 3.6 GHz band without coordination with Denmark, if the predicted field strength E_0 produced by a base station does not exceed 32 dB(μ V/m)/5 MHz, at the Danish borderline and beyond.
- 2.3 For base stations that are synchronized¹ between Denmark and Sweden or deployed as downlink only on both sides of the border, the following applies:
 - 2.3.1 Denmark may use the 3.6 GHz band without coordination with Sweden, if the predicted field strength E_0 produced by a base station does not exceed 67 dB(μ V/m)/5 MHz at the Swedish borderline and beyond and 49 dB(μ V/m)/5 MHz

¹ Synchronized TDD base stations operate aligned in time, so that there is no overlap between DL and UL transmission.

at a distance of 6 km from the Swedish borderline and beyond, excluding Onsala peninsula, see 2.3.2.

- 2.3.2 Denmark may use the 3.6 GHz band without coordination with Sweden, if the predicted field strength E_0 produced by a base station does not exceed 40 dB(μ V/m)/5 MHz at the Swedish borderline of Onsala peninsula.
- 2.3.3 Sweden may use the 3.6 GHz band without coordination with Denmark, if the predicted field strength E_0 produced by a base station does not exceed 67 dB(μ V/m)/5 MHz at the Danish borderline or beyond and 49 dB(μ V/m)/5 MHz at a distance of 6 km from the Danish borderline and beyond.

2.4 In cases of frequency block sizes other than 5 MHz, the predicted field strength E shall be adjusted by a factor in comparison with E_0 as defined in paragraphs 2.1 to 2.3:

$$E = E_0 + 10 \cdot \log_{10}(BW/5), \text{ where } BW \text{ is measured in MHz.}$$

2.5 The field strength values in this agreement are based on a receiving antenna height of 3 m above the ground, 10% of the time and 50% of location.

3. Use of Physical Cell Identifier (PCI)

3.1 In the case when LTE or 5G NR systems are used, preferential PCIs as defined in Annex 1 shall be used.

4. Coordination procedure

4.1 Establishment of agreements between operators shall be encouraged to the extent possible. Subject to agreement between operators other technical characteristics can be used, e.g. other field strength limits or propagation models.

4.2 Any case of interference shall as far as possible be resolved among operators concerned. If not resolved, or in case of unequal access to the spectrum band, assistance might be sought from the administrations.


5. Enter into force

5.1 This Agreement shall enter into force from the date of signature.

Place *København*

Date *29/10 2020*

For the Danish Energy Agency

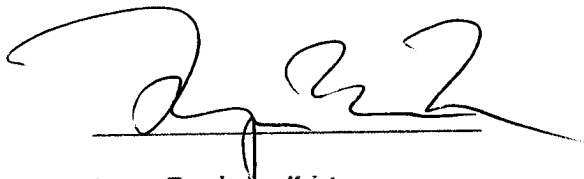


Jeppe Tanderup Kristensen

Senior Adviser, Center for Telecoms

Place *Stockholm*

Date *29 October 2020*

For the Swedish Post and Telecom Authority



Anders Palmberg

Deputy Head of Section for Spectrum Development,
Spectrum Department

ANNEX 1 - PREFERENTIAL PHYSICAL CELL IDENTIFIER (PCI) FOR LTE and 5G NR

PCI division, according to table below, shall be used in border areas to improve coverage and service when channel centre frequencies are aligned.

The PCIs are divided between the administrations according to the following tables:

Table A1. PCI division for LTE

PCI	Set A 0 to 83	Set B 84 to 167	Set C 168 to 251	Set D 252 to 335	Set E 336 to 419	Set F 420 to 503
Country	Denmark	Denmark	Denmark	Sweden	Sweden	Sweden

Table A2. PCI division for 5G NR²

PCI	Set A 0 to 83 504-587	Set B 84 to 167 588-671	Set C 168 to 251 672-755	Set D 252 to 335 756-839	Set E 336 to 419 840-923	Set F 420 to 503 924-1007
Country	Denmark	Denmark	Denmark	Sweden	Sweden	Sweden

² According to working document for revision of ECC REC (15)01